

# Setup Guide

## Tapo D205 Video Doorbell Mini

Welcome to the setup guide.

To ensure equal access for all users, we offer this accessible setup guide. This guide is designed to meet accessibility needs, enabling a successful setup. It will introduce the appearance of your doorbell, including its ports, buttons and labels, and then guide you through the setup process.

### Step 1. Know about your doorbell

In this section, we will describe the appearance of the doorbell and chime, including their ports, buttons, and labels.



1. You can find your doorbell and the USB cable in the package.

**USB Cable:** Type-A port at one end and Type-C port at the other end. You can find the cable in the package. Connect it to a USB charger to charge your doorbell.

2. Next, place your doorbell on a horizontal surface, such as on a shelf or desktop. Position it with the camera lens facing forward and on the upper side.

3. After positioning your doorbell correctly, we will introduce the ports, buttons, and labels on your device in a certain order.

**Microphone:** For capturing your voice. It is on the upper left corner next to the lens.

**Lens:** For capturing objects within its view.

**Motion Sensor:** It is right below the lens for detecting motion.

**IR LED:** It is neighboring to the motion sensor, right below it.

**Ring Button:** For ringing the doorbell.

**System LED:** It is a doorbell-shaped LED located in the center of the Ring button. It shows your doorbell status. You can check the doorbell status on the app.


Turn to the right panel to find the **speaker**.

Turn to the back panel to find the **RESET** button.

**RESET:** Press and hold the button for 5 seconds to reset the doorbell.

Turn to the bottom panel to find the **Type-C Power Port** on the left and **microSD card slot** on the right.

**Product label:** The product label is on the back of the doorbell through laser engraving.

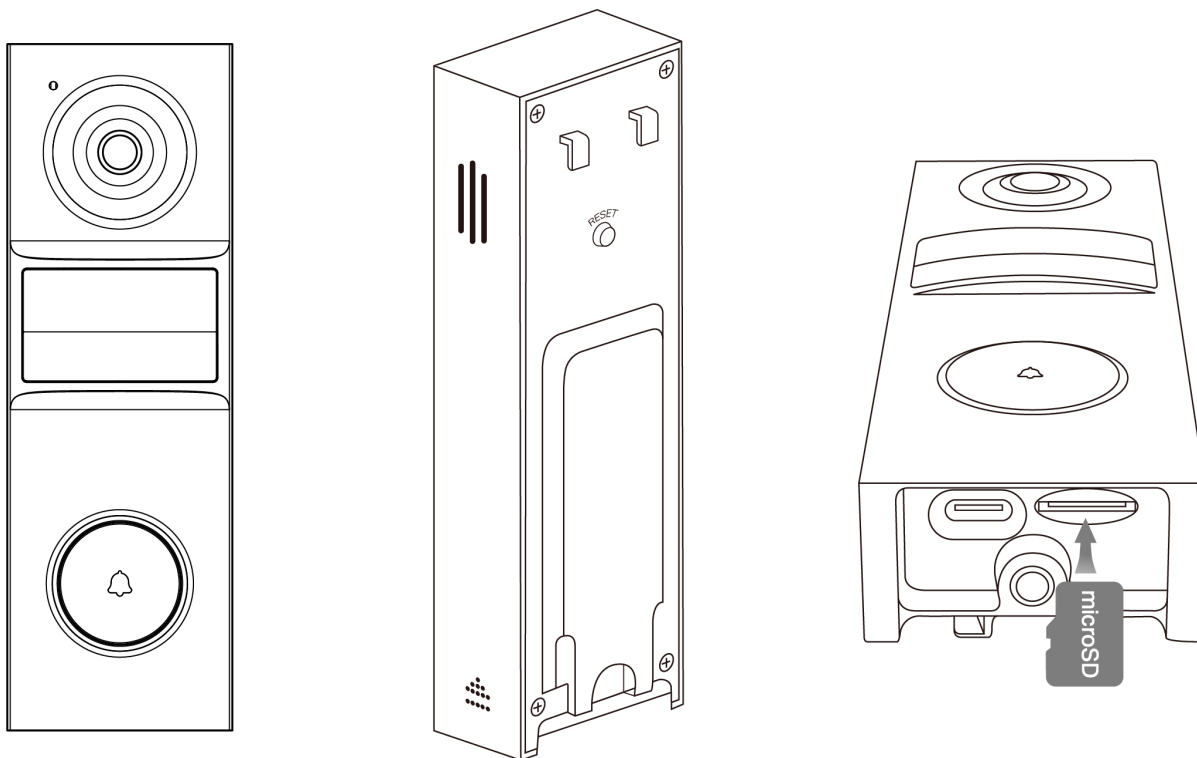

## Step 2. Set Up

1. Get the Tapo app from the App Store or Google Play, then log in.



2. Plug in the power adapter. Wait 30 seconds for the device to start up. You can hear a clicking sound.

3. Tap the + button in the app and select your device model. Follow the instructions on the Tapo app to set up your doorbell.

If you need help, please visit <https://www.tapo.com/support/> for technical support, the user guide, FAQs, warranty & more.

For details on Tapo app accessibility, please check [Accessibility Support](#).

### English: Safety Information

the device.

- Do not use any other chargers than those recommended.
- Do not use the device where wireless devices are not allowed.
- Adapter shall be easily accessible.
- Use only power supplies which are provided by manufacturer and in the original packing of this product.

If you have any questions, please don't hesitate to contact us.

- Keep the device away from fire or hot environments. DO NOT immerse in water or any other liquid.
- Do not disassemble, repair or modify the product.
- Do not place near automatically controlled devices such as fire alarms. Radio waves emitted from this product may cause such devices to malfunction resulting in an accident.
- Observe restrictions on using wireless products in fuel depots, chemical plants or when blasting operations are in progress.
- Do not use liquid to clean the product. Only use a dry cloth.
- Never put metal objects inside the product. If a metal object enters the product turn off the circuit breaker and contact an authorised electrician.
- This product is not intended to be used when providing medical care. Consult the manufacturer of any personal medical devices, such as pacemakers or hearing aids to determine if they are adequately shielded from external RF (radio frequency) energy.
- Do not use this product in health care facilities. Hospitals or health care facilities may be using equipment that could be sensitive to external RF energy.
- Do not place heavy objects on top of the product.
- When you leave the product unused for a long time unplug the product from the power outlet.
- This product may interfere with other electronic products such as TV, radios, personal computers, phones or other wireless devices.
- Always follow the local waste and recycle laws when you get rid of the used battery.
- Do not use the product if the casing has been broken. Danger of electric shock.
- Never touch the product with wet hands.

- This equipment can be powered only by equipments that comply with Power Source Class 2 ( PS2) or Limited Power Source (LPS) defined in the standard of IEC 62368-1.
- The mounting height should not be higher than 2 meters.
- Operating Temperature: -20 °C ~ 45 °C (-4 °F ~ 113 °F)

**CAUTION!**

Avoid replacement of a battery with an incorrect type that can defeat a safeguard.

Avoid disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.

Do not leave a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas; Do not leave a battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU, 2009/125/EC, 2011/65/EU and (EU)2015/863.

The original EU declaration of conformity may be found at <https://www.tapo.com/support/ce/>

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of the Radio Equipment Regulations 2017.

The original UK declaration of conformity may be found at <https://www.tapo.com/support/ukca/>

**Sign Up for News & Offers****Follow Us**

About

Press

Learning Center

- About Us
- Corporate Information
- Our Security Commitment
- Sustainability
- Privacy Policy
- Ethical Violation Complaint
- Accessibility
- Contact Us

- News
- Blog
- Awards
- Security Advisory

- Technology Library

©2025 TP-Link Systems Inc. and its affiliated companies. All rights reserved.

Worldwide / English

TP-Link, Tapo, Kasa, Omada, VIGI, Aginet, HomeShield, and Tapo Care branded products are products of TP-Link Systems Inc. or its affiliates.

Note: Some services and materials may require you to accept additional terms and conditions before access or use.

References to "TP-Link" may include TP-Link Systems Inc., its subsidiaries, or business units within the TP-Link corporate structure, as applicable.

The materials provided, including but not limited to press releases, presentations, blog posts, and webcasts, are current as of the date of publication and may be superseded by subsequent updates.