
## Baseus倍思

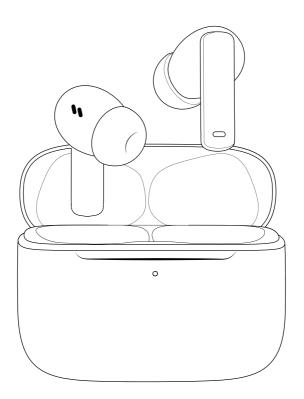

# **User Manual**

Baseus True Wireless Earphones Bowie M2+

## **Connection Steps**

#### 1 Turn on

The earphones will automatically turn on after opening the charging case lid.



3 Download the app and link the earphones to app.



#### Connection

Turn on wireless mode on your phone to search and pair the earphones.

Select device model: Baseus Bowie M2+



#### Turn off

Put the earbuds into the charging case and close the lid to power off the earphones.



## **Operation Instructions**

## Music mode:


- ▶I Play/ Pause: Put on/take off (L or R)
- Previous song: long-tab the left earphone 1.5s
- → Next song: long-tab the right earphone 1.5s

### 네 Noise cancellation mode:

Double tap left or right earphone (L or R) Note: order of modes: noise cancellation on > normal mode > transparency mode

#### Call mode:


- •• 🗣 Answer/ hang up: Double-tap left or right earphone (L or R)
- Reject a call: long-tab left or right earphone (L or R) 1.5s

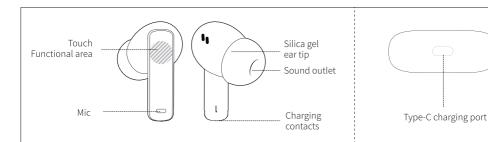

#### Battery charge level indicator:



① Charge earphones in the charging case: The white indicator blinks and goes off after 1-2 minutes.



① Charge the charging case through its power supply (or through wireless connection): During charging, the indicator blinks red. When fully charged, the indicator is steady on white

Non-charging state: Press the button to show the current battery level of the charging case. Battery level is lower than 20%: The red indicator is on and goes off in 5s. Battery level is in the range of 21% to 100%: The white indicator is on and goes off in 5s.

#### Restore default settings:

Open the lid and press and hold the button in the charging case for 5s. The red and white indicators blink three times simultaneously.

#### Low latency mode switchover:

Manually turn on/off in the Baseus APP.

#### Tips for using the app:

- 1. Customize your own gesture for earphones in the app.
- 2. Select and customize EO mode in the app.
- 3. Select and customize noise cancellation mode in the app.
- 4.The effective duration of searching function is about 35 hours. Please use the function for searching missing earphones during this period.
- 5. When the searching function is turned on in the app, the earphones will sound an alarm. Please ensure to use this function when not wearing your earbuds to avoid hearing damage.

Note: Go to Settings>App>App launch>Open manually "Baseus" app: Allow Auto-launch, Allow secondary launch and running in background.

## **Product safety information**

Improper use of the product can easily cause damage to the product or may endanger personal and property safety.

- 1. The battery is included in the product. Please avoid exposing your product to the sunlight, electric heater or similar overheating environments. Do not store the product in high temperature, strong light and strong magnetic places.
- 2. Do not keep it in other harsh environments such as fire source. Intense physical actions such as knocking, throwing, trampling on and squeezing etc. shall be avoided. Do not use it in case of expansion.
- 3. The ambient temperature of product is 0~45°C.
- 4. Inappropriate use of the product against this user manual or ignoring warnings can easily cause damage the product or may endanger personal and property safety. Consumer shall bear for all the consequences, to which our company will not assume any legal liability.
- 5. Decomposition of this product by non-professionals is strictly prohibited.
- 6. Do not use a load (electrical appliances) that exceeds the output current of this product. A circuit protection mechanism is built-in to automatically stop working if loads exceed.
- 7. Please use a clean cotton cloth to clean the charging contacts of earphones regularly to prevent it from failing to charge or turn on due to missing cleaning for a long time.
- 8. Do not put this product in water (or washing machine). If water enters the product, let it dry naturally before using it.

## **Product Specifications**

Model No.: Baseus Bowie M2+ Material: ABS+PC Version: V5.2 Communication distance: 10m Playtime: 5 hours (70% of the volume)

Name: Baseus True Wireless Earphones

Playtime with a charging case: 25~30hours Battery capacity: 40 mAh/0.148 Wh (earphones) 400 mAh/1.48 Wh (charging case) Earphone rating input: DC5V=80 mA
Charging case rating input: DC5V=600 mA
Earphone rating consumption current: 10 mA
Charging case rating current consumption: 160 mA
Fully charging time: about 1 hours(1.5hours for wireless charging)
Frequency response range: 20 Hz-20 kHz
Charge interface: Type-C

Suitable for: Compatible with most of wireless devices

\*The above data are measured by the Baseus laboratory, the actual use can be slightly different depending on the specific circumstances.

## Declaration on hazardous substances and elements contained in electronic products

	Hazardous substances and elements 🧿					
Part Descrption	Lead (pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent chromium (Cr VI)	Polybrominated Biphenyls (PBB)	Polybrominated Biphenyl ethers (PBDE)
PCB	Χ	0	0	0	0	0
Plastic	0	0	0	0	0	0
Battery	0	0	0	0	0	0
Accessory	0	0	0	0	0	0
charging cable	Χ	0	0	0	0	0

This form is compiled in accordance with SJ/T 11364.

O: It indicates that the content of the harmful substance in all homogeneous materials of the component is below the limit specified in GB/T 26572 standard.

X. The content of harmful substances in at least one homogeneous material of this part exceeds the limit stipulated in GB/T 26572 standard.

This product complies with EU RoHS 2.0 Directive (2011/65/EU)

Warm Tip: The 5-year icon refers to the "effective life of environmental protection", not the product quality assurance period. Electronic products all contain harmful substances such as lead, mercury and cadmium. Once they are overused, harmful substances may leak or mutate, cause pollution to the environment, or cause serious damage to people and property. The term of "environmental protection use" means that all electronic products will be required to use within this effective period. We will no longer be responsible for the quality of the products due to the safety risks that arise after the safe use period.

#### **Package Including**



This equipment complies with the provisions of Directive 2012/19/EU. 2006/66/EU. It is strictly forbidden to dispose of this equipment with ordinary trash; it must be recycled. This symbol indicates that the product shall not be treated as regular domestic trash, and must be delivered to a recycling center that is capable of recycling electronic and electrical equipment.

It is hereby declared that Baseus Bowie M2+, a product model of Shenzhen Baseus Technology Co., Ltd., complies with the provisions of Directive 2014/53/EU and Directive 2011/65/EU. The full text of the EC Declaration of Conformity can be found on the following website: www.baseus.com